

ADDRESSABLE

XP95A bases are compatible with both XP95A and Discovery detectors

XP95A Low Power Relay Base

The XP95A Low Power Relay Base incorporates a low power relay to control field equipment such as automatic door closers.

- Gives a set of voltage free contacts controlled by the remote output of a detector
- Draws negligible current

45681-242UL XP95A Low Power Relay Base 4"



XP95A Mounting Base

All detectors in the XP95A product line fit the XP95A Mounting Base which is a low insertion force base with stainless steel contacts for the detector terminals. XPERT Cards are supplied with all bases.

- XPERT addressing
- One way fit
- Locking feature to prevent unauthorized removal

45681-210USA XP95A Mounting Base 4"
45681-225USA XP95A Mounting Base 6"



E-Z Fit Base

The E-Z Fit Base is a low profile 6" mounting base for XP95A detectors.

- High degree of protection against unauthorized removal

45681-250 E-Z Fit Base




XP95A Isolating Base

The XP95A Isolating Base senses and detects short circuit faults on XP95A loops and spurs.

- Up to 20 devices may be installed between isolating bases
- XPERT addressing

45681-321USA XP95A Isolating Base

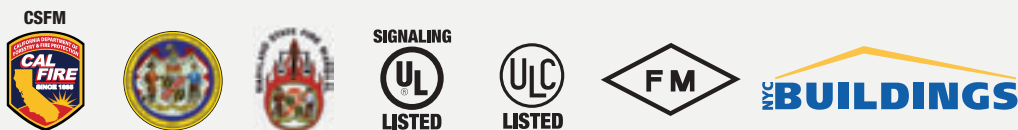

Please check the Apollo website on a regular basis for up-to-date approvals information.